

## 9-Port PoE Switch with 8 PoE Ports 15.4W (ONV-POE31008PN)

### 9-Port PoE Switch with 8 PoE Ports 15.4W



- ◆ Can supply power to network surveillance cameras that with PoE function
- ◆ 9x 10/100Mbps auto-sensing RJ45 ports, 8x 10/100Mbps PoE ports, 1x uplink port
- ◆ Supports port auto-flip (Auto MDI/ MDIX)
- ◆ Built-in power supply
- ◆ Maximum PoE ports power: 130W (Port 1 to Port 8)
- ◆ Maximum power of single PoE port: 15.4W
- ◆ Adopts store-and-forward architecture
- ◆ IEEE 802.3af power on up to 1-8 ports
- ◆ Features with fanless, natural cooling, small, compact and quiet design, suitable for desktop or wall
- ◆ Standard 1U rack

### Description


This ONV-POE31008PN switch provides a network point for power supply and data transmission. All the 9 Ethernet ports can be connected with 10/100Mbps quickly, and the uplink port is Ethernet interface, among which 1-8 ports can provide standard IEEE 802.3af power supply. Due the advanced self-sensing algorithm supply power for IEEE802.3af terminal unit only, there is no need to worry about damaging proprietary PoE or non-PoE standard equipment. In addition, it will stop power supply when PoE devices are not connected.

This cost-effective ONV-POE31008PN provide network layout need to simplify wireless access point (AP) and IP-based surveillance cameras network cameras in order to install in commercial network and home network. The devices far away from power socket are very suitable for hanging on the wall or ceiling. PoE eliminates the need for connecting these devices to power socket. So it make more flexible for those difficult to connect with AC power socket, and cut down the installation cost. It is ideal choice for those want to deploy a small commercial network and home network that use wireless access point (AP) and IP-based surveillance cameras.

## Technical Specification


<b>Product Name</b>	9-Port PoE Switch with 8 PoE Ports 15.4W
<b>Product Model</b>	ONV-POE31008PN
<b>Connector</b>	9x 10/100M copper cable RJ45 ports(all ports support MDI/MDIX) 8x PoE ports, 1x uplink port
<b>Transfer Mode</b>	Store-And-Forward
<b>Network Medium</b>	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or more UTP (≤100 meter)
	Data transmission distance: 100m
<b>Performance Specifications</b>	Bandwidth: 1.6Gbps (non-blocking) Network Latency (100 to 100M bps): maximum delay less than 20 microseconds Packet Buffer Memory: 768KB Address Database Size: 1K MTBF: 100,000 hours
<b>Network Protocols and Standards</b>	IEEE 802.3i 10BASET IEEE 802.3u 100BASETX IEEE 802.3x Flow Control IEEE 802.3af DTE Power via MDI IEEE 802.3at
<b>LEDs Status</b>	System: power supply Every Port: connecting, PoE working status
<b>Power</b>	Maximum PoE power: 130W PoE port power: 15.4W(1~8 port) Power input: AC100-240V 50/60Hz; (Power plug type can be customized)
<b>Dimensions/Weight</b>	Dimensions (LxWxH): 280 x 186 x 44mm    1.58kg
<b>Working Environment</b>	Operating Temperature: -20 ° ~ 55 ° C Storage Temperature: -20 ° ~ 75 ° C Operating Humidity: 10% ~ 95%, non-condensing
<b>Radiation</b>	CE mark, commercial FCC Part 15 Class B VCCI Class B EN 55022 (CISPR 22), Class B
<b>Safety</b>	CE Mark ,commercial CE/LVD EN60950, RoHS
<b>Warranty</b>	1 year warranty

Dimension

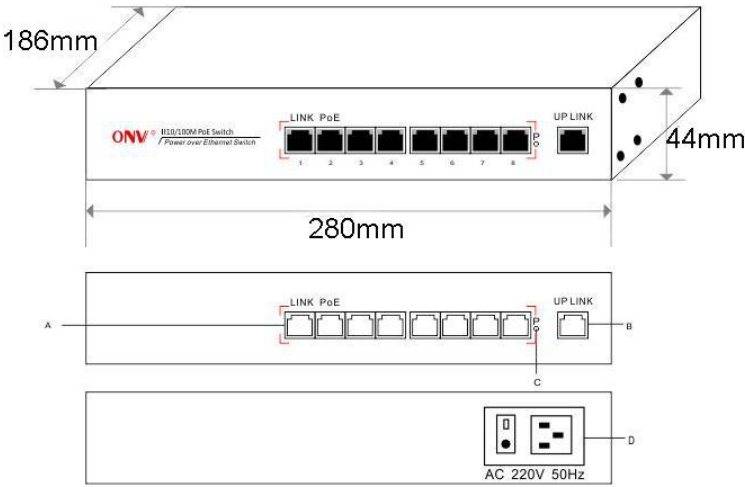

A. 8x PoE Power Port    B. Uplink Port  
C. PoE Output Light    D. AC 220V/50HZ Input

Application

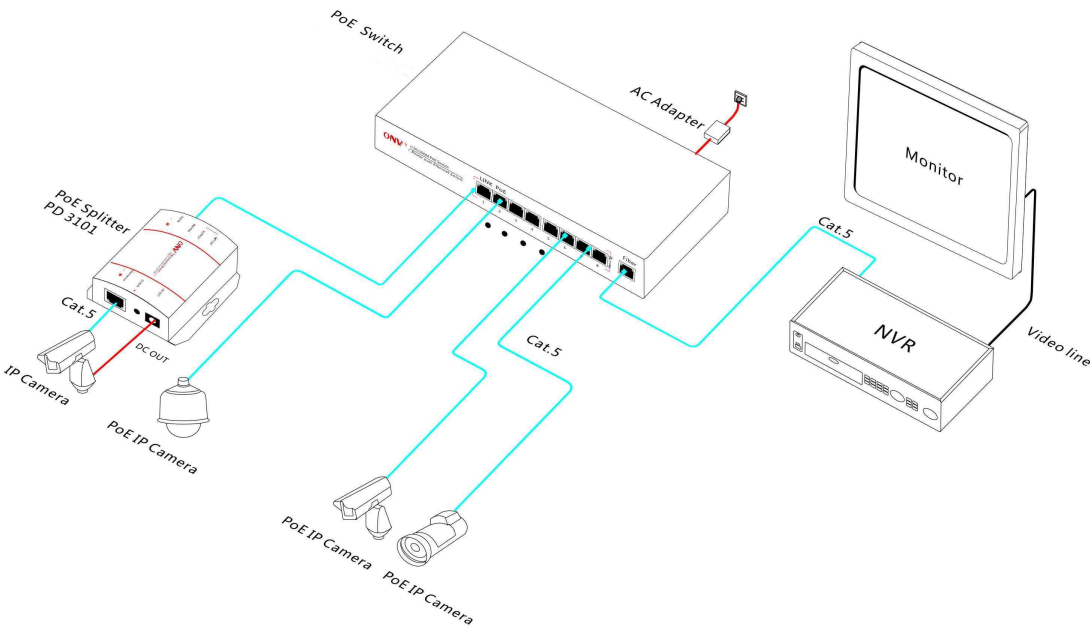

## Ordering Information

**Product Model:** ONV-POE31008PN

**Product Description:** 9x 10/100M Ethernet ports with 8x PoE ports and 1x uplink port, and 1-8 ports support IEEE802.3af POE international standard, each port power is 15.4W, total power is 130W

**Ordering Notes:** PoE default power supply is end-span (1/2, 3/6 line pair), alternative PoE Power supply is mid-span (4/5, 7/8 line pair)

## Packing List

<b>Packing List</b>	9-Port PoE Switch 15.4W (ONV-POE31008PN)
	Power Cable (Power adapter is built in the switch)
	User Guide
	Warranty Card

**Contact Us:****ONV Headquarter**

Tel: 0755-33376606

Fax: 0755-33376608

Technical Support: 0755-33376610

Website: <http://www.onvcom.com>

Zip: 518000

Address: Room 1003, Block D, Terra Building, Futian district, Shenzhen, China

**ONV Factory**

Tel: 0755-33079466

Fax: 0755-33079477

Email: [onv@onvcom.com](mailto:onv@onvcom.com)

Website: <http://www.onvcom.com>

Address: The 4-5th Floor, A building, SenYuTai (Science&Technology) Park, HuaNing Road, Dalang sub-district, Longhua new district, Shenzhen, China

